


非汽车件

变更目的	变更内容	修改人	修改日期	客户版本	内部版本
新产品	新结构	陈尧	2011.08.08	A	A0

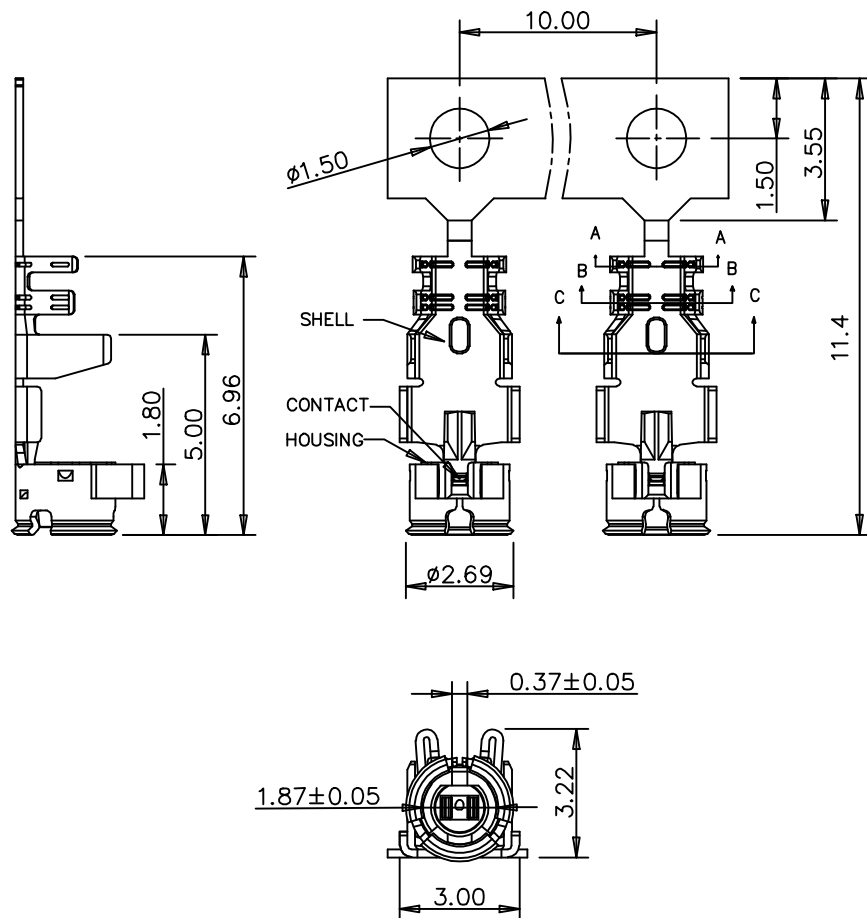



NOTES:

- VOLTAGE RATING: 60V AC/DC
- CURRENT VS. TEP. RISE: 0.3A AC/DC, 30 C RISE Max;
- INSULATION RESISTANCE: 500 MEGOHMS Min.
- DIELECTRIC WITHSTANDING VOLTAGE : 200V AC/Minute
- VSWR : 1.5Max AT 6GHz
- MATING FORCE AND UNMATING FORCE,SEE ITEM
- MATING FORCE: 3.5Kgf Max,UNMATING FORCE: 0.5Kgf Min
- DURABILITY: 30 TIMES.
- CABLE RETENTION FORCE:1.5Kgf MIN.


3	SHELL	COPPER ALLOY	GOLD PLATED OVER NI
2	CONTACT	COPPER ALLOY	GOLD PLATED OVER NI
1	HOUSING	PA66	UL94-0
NO	NAME	MATERIAL	DESCRIPTION

UNITS: mm	PART NO.: KS-MHF-13-N-01	昆山康顿电子科技有限公司 Kunshan Kangding Electronics Technology Co., Ltd.		
X.±	X'±	APPD:	DWG NO.: MHF-13-N-01	
.XX±0.2	.X'±	CHKD:	SCALE	SHEET
.XX±0.10	.XX'±	DR: Jesen	NONE	1/2
.XXX±	.XXX'±		REV.	A0

非汽车件

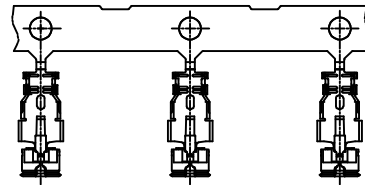

PACKAGE DIRECTION



NOTES:

1. PERFORMANCE

1-1. ELECTRICAL CHARACTERISTICS;

1-1-1.VOLTAGE RATING: 60V AC/DC

1-1-2.CURRENT VS. TEP. RISE: 0.3A AC/DC,30°C RISE Max;

1-1-3.CONTACT RESISTANCE : INITIAL 20 MILLIOHMS Max;
AFTER ENVIRONMENTAL : 25 MILLIOHMS Max;

1-1-4.INSULATION RESISTANCE: 500 MEGOHMS Min.

1-1-5.DIELECTRIC WITHSTANDING VOLTAGE : 200V AC/Minute

1-1-6.VSWR : 1.5Max AT 6GHz

1-2. MECHANICAL CHARACTERISTICS;:

1-2-1.MATING FORCE AND UNMATING FORCE,SEE ITEM
MATING FORCE: 3.5Kgf Max.

UNMATING FORCE: 0.5Kgf Min.

1-2-2.DURABILITY: 30 TIMES

1-3. ENVIRONMENT CHARACTERISTICS;





1-3-1.OPERATING TEMPERATURE : -30°C TO +80°C;

1-3-2.STORAGE TEMPERATURE : -45°C TO +85°C;

2. CABLE RETENTION FORCE:1.5Kgf Min

3. HARMFUL MATERIAL CONTROL PLEASE FOLLOW RoHS COMPLIANT.

3	SHELL	COPPER ALLOY	GOLD PLATED OVER NI
2	CONTACT	COPPER ALLOY	GOLD PLATED OVER NI
1	HOUSING	PA66	UL94-0
NO	NAME	MATERIAL	DESCRIPTION

UNITS: mm		PART NO.:	 昆山康硕电子科技有限公司 Kunshan Kunshan Electronics Technology Co., Ltd		
X.±	X*±	KS-MHF-13-N-01			
.X±0.2	.X*±	APPD:	DWG NO.:		
.XX±0.10	.XX*±	CHKD:	MHF-13-N-01		
.XXX±	.XXX*±	DR: Jesen	 SCALE	 SHEET	 REV.
			NONE	2/2	A0